


# Ferrite

## For Switching Power Supplies

### Original Cores

## PQ Bobbins


### Bobbins

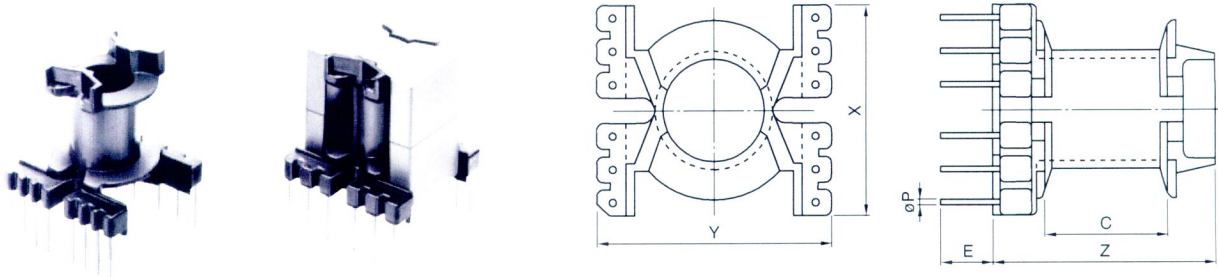

Part No.	Dimensions in		C	E	X	Y	Z
	mm	inches					
BPQ20/16-1114CPFR	17.2 .677	10.95 .431	8.0 .315	6.5 .256	23.0 .906	23.0 .906	18.3 .720
BPQ20/20-1114CPFR	17.2 .677	10.95 .431	12.0 .472	6.5 .256	23.0 .906	23.0 .906	22.3 .878
BPQ26/20-1112CPFR	21.6 .850	14.3 .563	9.2 .362	6.5 .256	26.5 1.043	29.3 1.154	21.5 .846
BPQ26/25-1112CPFR	21.6 .850	14.3 .563	13.9 .547	3.5 .138	26.5 1.043	29.3 1.154	29.1 1.146
BPQ32/20-1112CPFR	26.6 1.047	16.0 .630	9.0 .354	7.0 .276	32.0 1.260	34.0 1.339	22.5 .886
BPQ32/30-1112CPFR	26.6 1.047	16.0 .630	18.6 .732	7.0 .276	32.0 1.260	34.0 1.339	32.1 1.264
BPQ35/35-1112CPFR	31.1 1.224	16.9 .665	22.4 .882	7.5 .295	35.0 1.378	39.0 1.535	37.4 1.472
BPQ40/40-1112CPFR	36.0 1.417	17.5 .689	26.8 1.055	6.5 .256	40.0 1.575	42.0 1.654	44.8 1.764
BPQ50/50-1112CPFR	42.9 1.689	23.2 .913	32.4 1.276	10.0 .394	51.0 2.008	51.0 2.008	52.0 2.047

\* Please see the next page additionally.

### Connecting Pin Patterns (2.54mm/0.1 inch grids) View in mounting direction

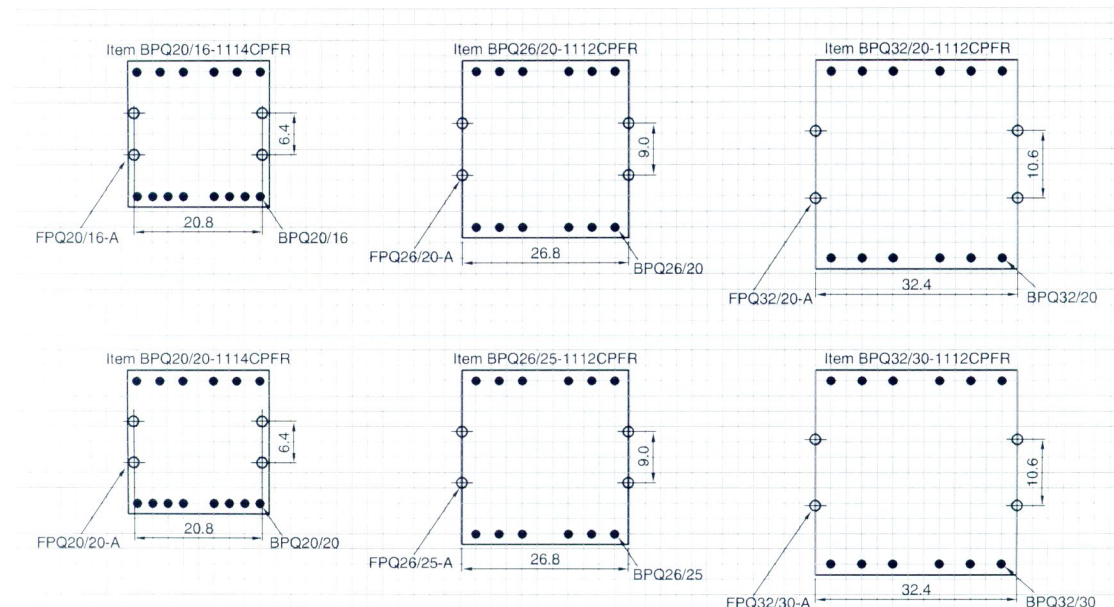

• All specifications are subject to change without notice.